


Sway Strut Assembly

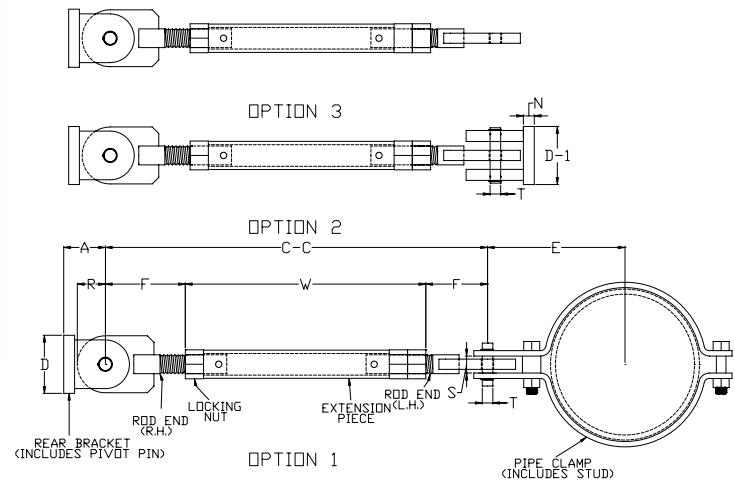

FEATURES:

- Effective under either tensile or compressive force.
- Self-aligning bushings permits a plus or minus 5-degree misalignment or angular motion. Bushings are coated with dry lubricant.

Load (lbs) • Weight (lbs) • Dimensions (inches)

Size	Part# 800/ Part# 801											Part# 800					Part# 801			
	Load	Ext. Piece	Rod End	A	F	D	D1	N	R	S	T	C-C		W		F	Weld Z	C-C		F
												Max	Min	Max	Min			Max	Min	
A	650	1	¾	1	3 ⁷ / ₁₆	2	1 ^¼	1 ^¼	5 ^{⁄8}	5 ^{⁄8}	0.374 0.372	60	16 ¹ / ₂	53 ¹ / ₈	9 ⁵ / ₈	3 ⁷ / ₁₆	¾	60	12 ¹ / ₈	2 ¹¹ / ₁₆
B	1500	2 ¹ / ₂	1	2 ¹ / ₂	4 ⁷ / ₁₆		2 ³ / ₈	5 ^{⁄8}	1 ³ / ₈	0.749 0.747	108	19	99 ¹ / ₈	10 ¹ / ₈	4 ⁷ / ₁₆	5 ¹ / ₁₆		96	14 ⁷ / ₁₆	3 ¹¹ / ₁₆
C	4500	2	1		4 ¹³ / ₁₆		2 ⁷ / ₈	¾			0.999 0.997	21	110 ³ / ₈	11 ³ / ₈	4 ¹³ / ₁₆				5 ¹ / ₁₆	16 ¹ / ₂
1	8000		1 ^¼	5	3				3 ³ / ₁₆	1 ¹ / ₂		1 ¹¹ / ₁₆	0.999 0.997		21 ³ / ₈	110	5			16 ⁷ / ₈
2	11630	2 ¹ / ₂	1 ¹ / ₂				3 ⁷ / ₄	6 ¹ / ₈			4 ¹ / ₄			1 ¹ / ₂	1 ¹¹ / ₁₆	22 ⁷ / ₈	108 ¹ / ₂	5 ³ / ₄	18 ³ / ₈	5
3	15700		1 ³ / ₄	3	6				7 ³ / ₄	7 ⁷ / ₈		5 ³ / ₈	7 ³ / ₄			3	2 ³ / ₈	1.249 1.247	25	108
4	20700	3	2	4	7 ³ / ₄		6 ¹ / ₈	4 ¹ / ₄	1 ¹ / ₄	2 ¹ / ₂	2	1.249 1.247	26 ¹ / ₂	106 ¹ / ₂	13	6 ³ / ₄	¾	22	6	
5	27200		2 ¹ / ₄									4	7 ³ / ₄	6 ¹ / ₈	4 ¹ / ₄	1 ¹ / ₄		2 ¹ / ₂	2	1.499 1.497
6	33500	4	2 ¹ / ₂	5	7 ⁵ / ₈	7 ⁷ / ₈	5 ³ / ₈	7 ³ / ₄	3	2 ³ / ₈	1.749 1.747	32 ¹ / ₂	102 ¹ / ₂	15	8 ³ / ₄	5 ^{⁄8}	28	8		
7	68200		3	5 ³ / ₄	8 ³ / ₄	9 ¹ / ₈	6 ¹ / ₄	2	3 ¹ / ₂	3	1.999 1.997	31 ¹ / ₄	98	17 ¹ / ₄	11	¾	34 ³ / ₄	10 ¹ / ₄		
8	120000	6	4	7 ¹ / ₄	11	14	7 ³ / ₄	2 ¹ / ₄	7 ³ / ₄	3 ³ / ₈	2.499 2.497									