
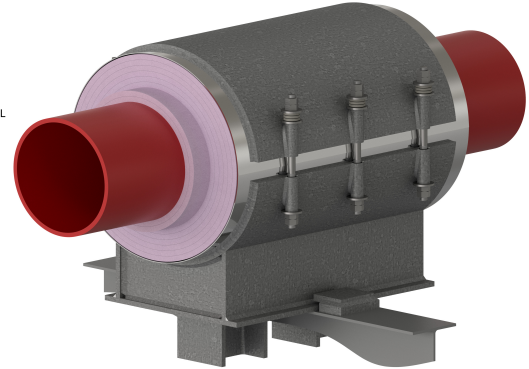


HAPW - 8 x 30 - 4 - 24 - 5950 - 2085 - 8930

PyroWrap Anchored Support

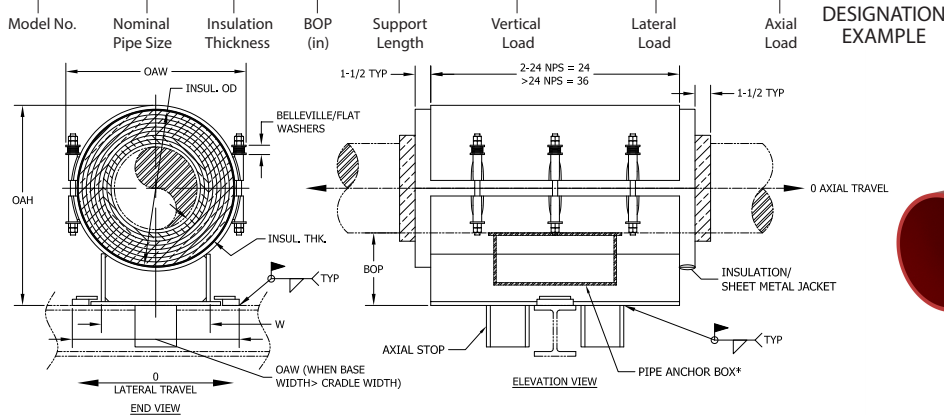

NOTES)

1) All dimensions in inches unless noted.

* - Pipe anchor box to be compatible with process pipe material.

PIPE SIZE	LOW LOAD OPTION			HIGH LOAD OPTION			INSULATION THICKNESS																				
							10mm				20mm				30mm				40mm				50mm				
	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	
Do you need special loads or dimensions for this design? Please contact us at (713) 466-4777 or sales@rilco.com!																											
1"	200	70	410	910	320	1360	4	2.2	6	6	4	2.9	6.5	6.5	4	3.7	7	7	4	4.5	8	7.5	4	5.3	8.5	7.5	
1-1/2"	290	105	590	1310	460	1970	4	2.7	6.5	6.5	4	3.5	7	7	4	4.3	7.5	7.5	4	5.1	8.5	8	4	5.9	9	8.5	
2"	360	130	730	1640	575	2460	4	3.2	6.5	7	4	4	7.5	7.5	4	4.8	8	8	4	5.6	9	8.5	4	6.4	9.5	9	
2-1/2"	440	155	890	1980	695	2980	4	3.7	7	7.5	4	4.5	8	8	4	5.3	8.5	8.5	4	6.1	9	9	4	6.9	10	9.5	
3"	530	190	1400	2420	850	3620	4	4.3	7.5	8.5	4	5.1	8.5	8.5	4	5.9	9	9	4	6.7	9.5	9.5	4	7.5	10.5	10	
4"	840	295	1730	3110	1090	4660	4	5.3	10	9.5	4	6.1	10.5	9.5	4	6.9	11.5	10	4	7.7	12	10.5	4	8.5	13	11	
6"	1275	450	2400	4570	1600	6860	4	7.5	12	11.5	4	8.2	12.5	12	4	9	13.5	12.5	4	9.8	14	12.5	4	10.6	15	13	
8"	1700	595	3020	5950	2085	8930	4	9.5	14	13.5	4	10.2	15	14	4	11	15.5	14.5	4	11.8	16.5	14.5	4	12.6	17	15	
10"	2000	700	3700	7420	2600	11130	4	11.6	16	15.5	4	12.4	17	16	4	13.2	17.5	16.5	4	13.9	18.5	17	4	14.7	19	17	
12"	2200	770	4320	8800	3080	13200	4	13.6	17	17.5	4	14.4	18	18	4	15.2	19	18.5	4	15.9	19.5	19	4	16.7	20.5	19	
14"	2500	875	4700	10000	3500	15000	4	14.8	19	19	4	15.6	20	19.5	4	16.4	21	19.5	4	17.2	21.5	20	4	18	22.5	20.5	
16"	2900	1015	5340	11600	4060	17400	4	16.8	21.5	21	4	17.6	22.5	21.5	4	18.4	23.5	22	4	19.2	24	22	6	20	25	24.5	
18"	3200	1120	5970	12800	4480	19200	4	18.8	23.5	23	4	19.6	24.5	23.5	4	20.4	25.5	24	4	21.2	26	24	6	22	27	26.5	
20"	3400	1190	6600	13600	4760	20400	4	20.8	27.5	25	4	21.6	28.5	25.5	4	22.4	29.5	26	4	23.2	30	26	6	24	31	28.5	
24"	3600	1260	7850	14400	5040	21600	4	24.8	33.5	29	4	25.6	34.5	29.5	4	26.4	35.5	30	4	27.2	36	30.5	6	28	37	32.5	
30"	4700	1645	9740	18800	6580	28200	4	30.8	39.5	35	4	31.6	40.5	35.5	4	32.4	41.5	36	6	33.2	42	38.5	6	34	43	38.5	
36"	5500	1925	11600	22000	7700	33000	4	36.8	46	41	4	37.6	47	41.5	4	38.4	47.5	42	6	39.2	48.5	44.5	6	40	49	44.5	
42"	6200	2170	13500	24800	8680	37200	4	42.8	52	47	4	43.6	53	47.5	4	44.4	53.5	48	6	45.2	54.5	50.5	6	46	55	50.5	
48"	7100	2485	15460	28400	9940	61830	4	48.8	60	53	4	49.6	61	53.5	4	50.4	61.5	54	6	51.2	62.5	56.5	6	52	63	56.5	
56"	8300	2905	18070	33100	11585	72060	4	56.8	64	61	4	57.6	65	61.5	4	58.4	65.5	62	6	59.2	66.5	64.5	6	60	67	64.5	
60"	8900	3115	19380	35500	12425	77290	4	60.8	70	65	4	61.6	71	65.5	4	62.4	71.5	66	6	63.2	72.5	68.5	6	64	73	68.5	
66"	9800	3430	21340	39000	13650	84910	4	66.8	76	70	4	67.6	77	70.5	4	68.4	77.5	71	6	69.2	78.5	73.5	6	70	79	73.5	
72"	10700	3745	23300	42600	14910	92750	4	72.8	66	77	4	73.6	66.5	77.5	4	74.4	67	78	6	75.2	68	80.5	6	76	68.5	80.5	

*W - Dimension is calculated by multiplying (INSULATION OD*0.65), when base is not a WT member.

Applications & Features:

- Temperature range from -40 Deg F to 1200 Deg F
- Higher temperature applications available
- Teflon®/2B SS 304 slide plates on shoe and supporting steel
- Design loads based on a safety factor of 5
- A36 steel construction
- Patented anchor system allows increased load carrying capability and decreased heat transfer
- See technical specification RHS-750
- Test results available upon request
- Steel finish available in galvanized finish or painted
- Increased loading capability available. Contact Rilco for additional information
- Support constructed in accordance with ASME B31.1, B31.3 and MSS-SP58
- A307 or A193 B7 plated bolts/studs

For special applications or for information on other insulation thicknesses or pipe sizes, please contact us!

Ordering Instructions:

To Order, Please Specify:



- Model Number
- Nominal Pipe Size
- Insulation Thickness
- BOP
- Support Length
- Vertical Load
- Movements

* See page 69 of this catalog for new designation model number construction.

** Information presented on this page subject to change without notice.

HAPW - 8 x 30 - 4 - 24 - 5950 - 2085 - 8930

PyroWrap Anchored Support

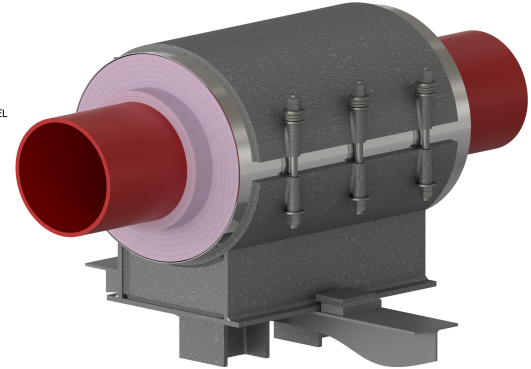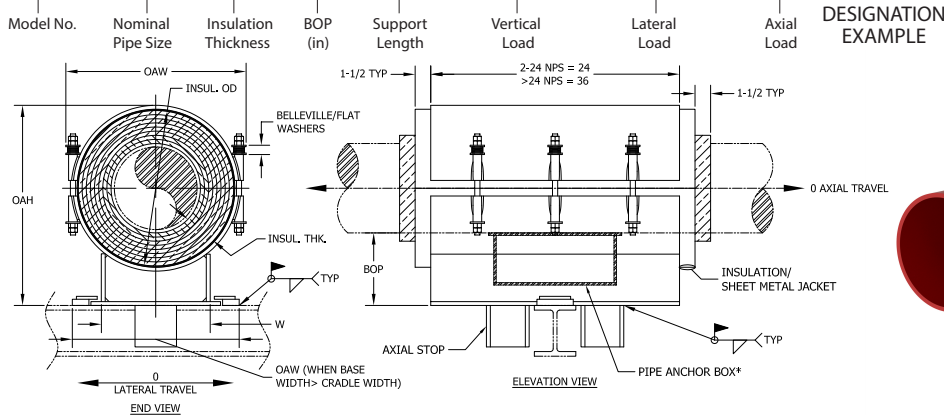

NOTES)

1) All dimensions in inches unless noted.

* - Pipe anchor box to be compatible with process pipe material.

PIPE SIZE	LOW LOAD OPTION			HIGH LOAD OPTION			INSULATION THICKNESS																							
	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)
Do you need special loads or dimensions for this design? Please contact us at (713) 466-4777 or sales@rilco.com!																														
1"	200	70	410	910	320	1360	4	6.1	9	8	6	6.9	10	10.5	6	7.7	10.5	11	6	8.5	11	11.5	6	9.2	12	11.5				
1-1/2"	290	105	590	1310	460	1970	4	6.7	9.5	8.5	6	7.5	10.5	11	6	8.2	11	11.5	6	9	11.5	12	6	9.8	12.5	12.5				
2"	360	130	730	1640	575	2460	4	7.1	10	9	6	7.9	10.5	11.5	6	8.7	11.5	12	6	9.5	12	12.5	6	10.3	13	13				
2-1/2"	440	155	890	1980	695	2980	4	7.6	10.5	9.5	6	8.4	11	12	6	9.2	12	12.5	6	10	12.5	13	6	10.8	13.5	13.5				
3"	530	190	1400	2420	850	3620	4	8.3	11	10.5	6	9.1	12	12.5	6	9.8	12.5	13	6	10.6	13.5	13.5	6	11.4	14.5	14				
4"	840	295	1730	3110	1090	4660	4	9.3	14	11.5	6	10.1	14.5	13.5	6	10.8	15.5	14	6	11.6	16	14.5	6	12.4	17	15				
6"	1275	450	2400	4570	1600	6860	4	11.4	16	13.5	6	12.2	16.5	16	6	13	17.5	16.5	6	13.8	18	16.5	6	14.5	19	17				
8"	1700	595	3020	5950	2085	8930	6	13.4	18	17.5	6	14.2	18.5	18	6	15	19.5	18.5	6	15.8	20.5	18.5	8	16.5	21	21				
10"	2000	700	3700	7420	2600	11130	6	15.5	20	19.5	6	16.3	20.5	20	6	17.1	21.5	20.5	6	17.9	22.5	21	8	18.7	23	23				
12"	2200	770	4320	8800	3080	13200	6	17.5	21	21.5	6	18.3	22	22	6	19.1	22.5	22.5	6	19.9	23.5	23	8	20.7	24.5	25				
14"	2500	875	4700	10000	3500	15000	6	18.8	23	23	6	19.6	24	23.5	6	20.3	24.5	23.5	6	21.1	25.5	24	8	21.9	26.5	26.5				
16"	2900	1015	5340	11600	4060	17400	6	20.8	25.5	25	6	21.6	26.5	25.5	6	22.3	27	26	8	23.1	28	28	8	23.9	29	28.5				
18"	3200	1120	5970	12800	4480	19200	6	22.8	27.5	27	6	23.6	28.5	27.5	6	24.3	29	28	8	25.1	30	30	8	25.9	31	30.5				
20"	3400	1190	6600	13600	4760	20400	6	24.8	31.5	29	6	25.6	32.5	29.5	6	26.3	33	30	8	27.1	34	32	8	27.9	35	32.5				
24"	3600	1260	7850	14400	5040	21600	6	28.8	37.5	33	6	29.6	38.5	33.5	6	30.3	39	34	8	31.1	40	36.5	8	31.9	41	36.5				
30"	4700	1645	9740	18800	6580	28200	6	34.8	43.5	39	6	35.6	44.5	39.5	8	36.3	45	42	8	37.1	46	42.5	8	37.9	47	42.5				
36"	5500	1925	11600	22000	7700	33000	6	40.8	50	45	6	41.6	51	45.5	8	42.3	51.5	48	8	43.1	52.5	48.5	8	43.9	53	48.5				
42"	6200	2170	13500	24800	8680	37200	6	46.8	56	51	6	47.6	57	51.5	8	48.3	57.5	54	8	49.1	58.5	54.5	8	49.9	59	54.5				
48"	7100	2485	15460	28400	9940	61830	6	52.8	64	57	6	53.6	65	57.5	8	54.3	65.5	60	8	55.1	66.5	60.5	8	55.9	67	60.5				
56"	8300	2905	18070	33100	11585	72060	6	60.8	68	65	6	61.6	69	65.5	8	62.3	69.5	68	8	63.1	70.5	68.5	8	63.9	71	68.5				
60"	8900	3115	19380	35500	12425	77290	6	64.8	74	69	6	65.6	75	69.5	8	66.3	75.5	72	8	67.1	76.5	72.5	8	67.9	77	72.5				
66"	9800	3430	21340	39000	13650	84910	6	70.8	80	74	6	71.6	81	74.5	8	72.3	81.5	77	8	73.1	82.5	77.5	8	73.9	83	77.5				
72"	10700	3745	23300	42600	14910	92750	6	76.8	69.5	81	6	77.6	70	81.5	8	78.3	70.5	84	8	79.1	71	84.5	8	79.9	72	84.5				

*W - Dimension is calculated by multiplying (INSULATION OD*0.65), when base is not a WT member.

Applications & Features:

- Temperature range from -40 Deg F to 1200 Deg F
- Higher temperature applications available
- Teflon®/2B SS 304 slide plates on shoe and supporting steel
- Design loads based on a safety factor of 5
- A36 steel construction
- Patented anchor system allows increased load carrying capability and decreased heat transfer
- See technical specification RHS-750
- Test results available upon request
- Steel finish available in galvanized finish or painted
- Increased loading capability available. Contact Rilco for additional information
- Support constructed in accordance with ASME B31.1, B31.3 and MSS-SP58
- A307 or A193 B7 plated bolts/studs

For special applications or for information on other insulation thicknesses or pipe sizes, please contact us!

Ordering Instructions:

To Order, Please Specify:



- Model Number
- Nominal Pipe Size
- Insulation Thickness
- BOP
- Support Length
- Vertical Load
- Movements

* See page 69 of this catalog for new designation model number construction.

** Information presented on this page subject to change without notice.

HAPW - 8 x 30 - 4 - 24 - 5950 - 2085 - 8930

PyroWrap Anchored Support

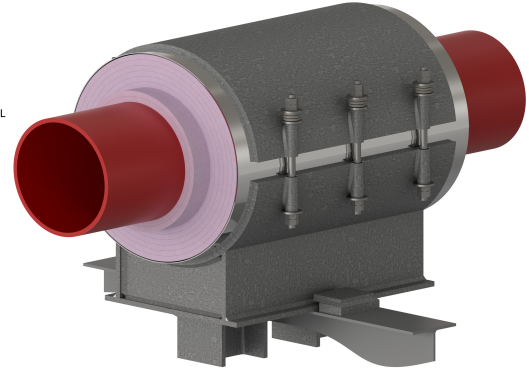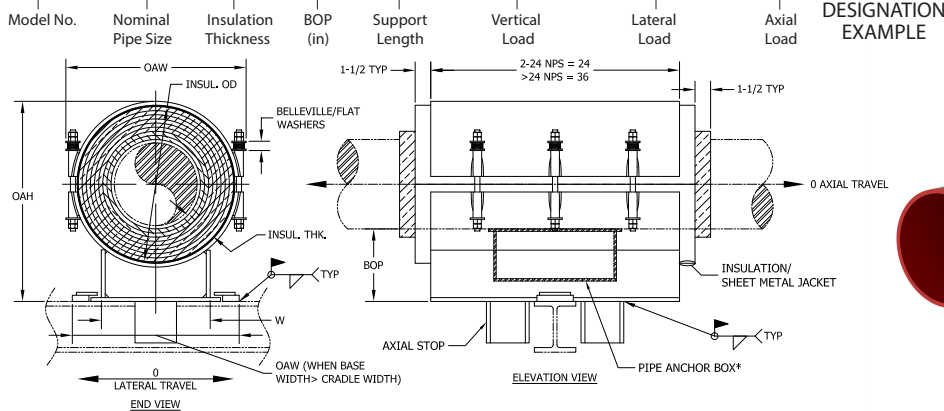

NOTES)

1) All dimensions in inches unless noted.

* - Pipe anchor box to be compatible with process pipe material.

PIPE SIZE	LOW LOAD OPTION			HIGH LOAD OPTION			INSULATION THICKNESS																				
							110mm				120mm				130mm				140mm				150mm				
	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	VERT. (lbs)	LAT. (lbs)	AXI. (lbs)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	BOP (in)	INSUL. OD (in)	OAW (in)	OAH (in)	
Do you need special loads or dimensions for this design? Please contact us at (713) 466-4777 or sales@rilco.com!																											
1"	200	70	410	910	320	1360	8	10	12.5	14	8	10.8	13.5	14.5	8	11.6	14	15	8	12.4	15	15.5	10	13.2	15.5	17.5	
1-1/2"	290	105	590	1310	460	1970	8	10.6	13	14.5	8	11.4	14	15	8	12.2	14.5	15.5	8	13	15.5	16	10	13.8	16	18.5	
2"	360	130	730	1640	575	2460	8	11.1	13.5	15	8	11.9	14.5	15.5	8	12.7	15	16	8	13.4	16	16.5	10	14.2	16.5	18.5	
2-1/2"	440	155	890	1980	695	2980	8	11.6	14	15.5	8	12.4	15	16	8	13.2	15.5	16.5	8	13.9	16.5	17	10	14.7	17.5	19	
3"	530	190	1400	2420	850	3620	8	12.2	15	16.5	8	13	16	16.5	8	13.8	16.5	17	8	14.6	17.5	17.5	10	15.4	18.5	20	
4"	840	295	1730	3110	1090	4660	8	13.2	17.5	17.5	8	14	18.5	17.5	8	14.8	19.5	18	8	15.6	20	18.5	10	16.4	21	21	
6"	1275	450	2400	4570	1600	6860	8	15.3	19.5	19.5	8	16.1	20.5	20	8	16.9	21.5	20.5	8	17.7	22	20.5	10	18.5	23	23	
8"	1700	595	3020	5950	2085	8930	8	17.3	22	21.5	8	18.1	22.5	22	8	18.9	23.5	22.5	10	19.7	24	24.5	10	20.5	25	25	
10"	2000	700	3700	7420	2600	11130	8	19.5	24	23.5	8	20.2	24.5	24	8	21	25.5	24.5	10	21.8	26	27	10	22.6	27	27	
12"	2200	770	4320	8800	3080	13200	8	21.5	25	25.5	8	22.2	26	26	8	23	26.5	26.5	10	23.8	27.5	29	10	24.6	28.5	29	
14"	2500	875	4700	10000	3500	15000	8	22.7	27	27	8	23.5	28	27	8	24.3	28.5	27.5	10	25.1	29.5	30	10	25.9	30.5	30.5	
16"	2900	1015	5340	11600	4060	17400	8	24.7	29.5	29	8	25.5	30.5	29.5	10	26.3	31	32	10	27.1	32	32	10	27.9	33	32.5	
18"	3200	1120	5970	12800	4480	19200	8	26.7	31.5	31	8	27.5	32.5	31.5	10	28.3	33	34	10	29.1	34	34	10	29.9	35	34.5	
20"	3400	1190	6600	13600	4760	20400	8	28.7	35.5	33	8	29.5	36.5	33.5	10	30.3	37	36	10	31.1	38	36	10	31.9	39	36.5	
24"	3600	1260	7850	14400	5040	21600	8	32.7	41.5	37	8	33.5	42.5	37.5	10	34.3	43	40	10	35.1	44	40.5	10	35.9	45	40.5	
30"	4700	1645	9740	18800	6580	28200	8	38.7	47.5	43	10	39.5	48.5	45.5	10	40.3	49	46	10	41.1	50	46.5	10	41.9	51	46.5	
36"	5500	1925	11600	22000	7700	33000	8	44.7	54	49	10	45.5	54.5	51.5	10	46.3	55.5	52	10	47.1	56.5	52.5	10	47.9	57	52.5	
42"	6200	2170	13500	24800	8680	37200	8	50.7	60	55	10	51.5	60.5	57.5	10	52.3	61.5	58	10	53.1	62.5	58.5	10	53.9	63	58.5	
48"	7100	2485	15460	28400	9940	61830	8	56.7	68	61	10	57.5	68.5	63.5	10	58.3	69.5	64	10	59.1	70.5	64.5	10	59.9	71	64.5	
56"	8300	2905	18070	33100	11585	72060	8	64.7	72	69	10	65.5	72.5	71.5	10	66.3	73.5	72	10	67.1	74.5	72.5	10	67.9	75	72.5	
60"	8900	3115	19380	35500	12425	77290	8	68.7	78	73	10	69.5	78.5	75.5	10	70.3	79.5	76	10	71.1	80.5	76.5	10	71.9	81	76.5	
66"	9800	3430	21340	39000	13650	84910	8	74.7	84	78	10	75.5	84.5	80.5	10	76.3	85.5	81	10	77.1	86.5	81.5	10	77.9	87	81.5	
72"	10700	3745	23300	42600	14910	92750	8	80.7	92.5	85	10	81.5	93.5	87.5	10	82.3	94	88	10	83.1	94.5	88.5	10	83.9	95.5	88.5	

*W - Dimension is calculated by multiplying (INSULATION OD*0.65), when base is not a WT member.

Applications & Features:

- Temperature range from -40 Deg F to 1200 Deg F
- Higher temperature applications available
- Teflon®/2B SS 304 slide plates on shoe and supporting steel
- Design loads based on a safety factor of 5
- A36 steel construction
- Patented anchor system allows increased load carrying capability and decreased heat transfer
- See technical specification RHS-750
- Test results available upon request
- Steel finish available in galvanized finish or painted
- Increased loading capability available. Contact Rilco for additional information
- Support constructed in accordance with ASME B31.1, B31.3 and MSS-SP58
- A307 or A193 B7 plated bolts/studs

For special applications or for information on other insulation thicknesses or pipe sizes, please contact us!

Ordering Instructions:

To Order, Please Specify:

- Model Number
- Nominal Pipe Size
- Insulation Thickness
- BOP
- Support Length
- Vertical Load
- Movements

* See page 69 of this catalog for new designation model number construction.

** Information presented on this page subject to change without notice.