


RCS-80V Type C

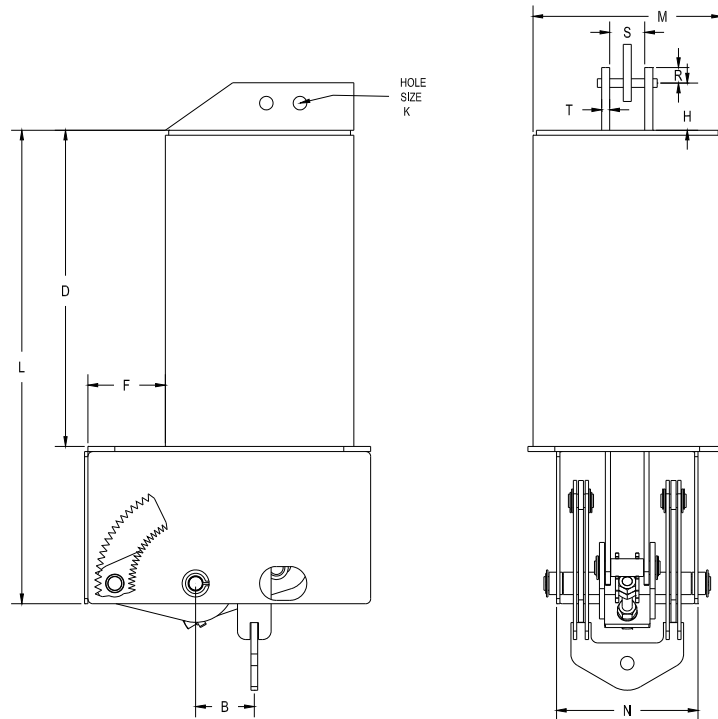

The RCS-80V "TYPE C" is manufactured using two(2) lugs to accommodate attachment to the building structure and allowing for the use of various types of attachments. (Example: RILCO Part# 220). Available in most types of finishes.

Hanger Sizes	L	D	F		H	I	M	N	Q	R	T	Total Travel (in.)	Factors	A (max.)	
10-18	18 7/8	8 7/8	2		1 1/2	-	8 5/8	6 7/16	1 3/8	1.5	3/8	≤ 5 >5 1/2	19 5/16 21 5/8	3/4	
19-34	28 1/2	16	2 1/8		2	-	12 3/4	8 9/16	1 5/8	1.5	5/8	≤ 5 >5 1/2	31 1/16 33 3/16	1 1/4	
35-49	32 3/4	18 1/4	4 3/4		3	-	14	9 13/16	2 1/2	-	3/4	≤ 6 >6 1/2	36 7/8 41 1/2	1 3/4	
50-63	46 7/8	28 1/8	8 5/16		4	-	18	11 1/4	3	-	1	≤ 11 >11 1/2	52 1/2 57 3/4	2 1/4	
64-74	60	36 3/4	1 3/16		5	25 3/8	22 3/16	11	3	3	1/2	≤10 1/2 > 11	77 1/4 77 3/8	2 3/4	
75-83	60 1/2	37 1/4	1 1/2		4 1/2	25 3/8	27 3/16	11	3	3.75	1	≤10 1/2 > 11	77 15/16 78 1/16	3 1/4*	
84-110	See Page #22														
A-rod Selection Chart															
Loads (lbs)	0 800	801 1500	1501 2540	2541 4000	4001 6100	6101 9400	9401 13400	13401 18300	18301 24700	24701 31000	31001 39000	39001 48000	48001 58000		
A-Rod Size	1/2	5/8	3/4	1	1 1/4	1 1/2	1 3/4	2	2 1/4	2 1/2	2 3/4	3	3 1/4*		
K-Hole	11/16	13/16	15/16	1 1/4	1 1/2	1 3/4	2	2 3/8	2 5/8	2 7/8	3 1/8	3 3/8	3 5/8		
S	7/8	1 1/16	1 1/4	1 5/8	2	2 3/8	2 5/8	2 7/8	3 1/8	3 3/8	3 5/8	3 7/8	4 1/8		
* 3 3/4" is furnished with 8 UN series thread.															

* 3 3/4" is furnished with 8 UN series thread.